


CYCLE SCRATCH COAT

RAS01

Epoxy smoothing

Colored epoxy smoothing cycle with formulations with high solids content, 0.65 mm thick to be applied on substrates free from rising damp.

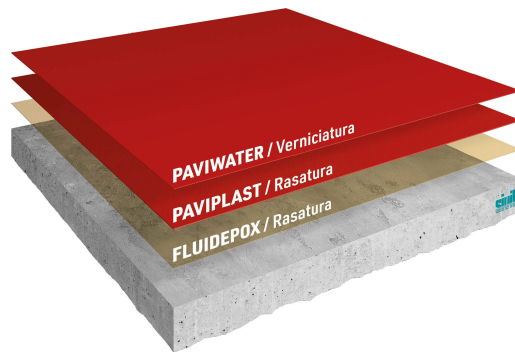

Preparation of the substrate

The Concrete Substrate must be solid, dry, levelled, absorbent, not polluted by oils, cleaners, dust or any other substance. For new concrete substrate, the seasoning time must be respected. Choose the most convenient mechanical preparation: Grinding or Shot-Blasting. As this is a non-transpirant cycle, verify the presence of a vapour barrier as humidity from ground up has to be avoided.

Application

The resulting thickness of the coating is approximately 0.65 mm.

Used products

FLUIDEPOX® A+B

Low viscosity epoxy product

PAVIPLAST® A+B

Self-levelling epoxy covering

PAVIWATER® A+B

Waterborne epoxy paint

The above information corresponds to our best scientific and practical knowledge and does not imply any guarantees and/or liability for Sivit, as the conditions of use are beyond our control. The purchaser is responsible for verifying the suitability of the products for the specific case.