


# SYSTEM FLOOR SEAL VER07

## Coating for tiled surfaces

**Colored coating system for ceramic surfaces free from rising damp.**

The system is based on epoxy resins in water-based formulation. This system is capable of renewing the environment while keeping the tiles visible. If you want to completely “hide” the tiles, it is necessary to use a higher-thickness system, either multilayer (MST05) or self-leveling (AUTO9).

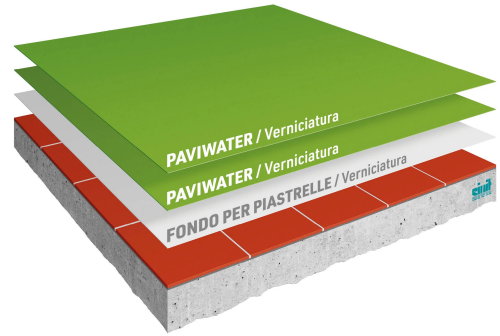

### Surface Preparation

Mechanical preparation of the substrate by grinding the tiles with fine-grain tools.

### Application

1. Apply one coat of **FONDO PER PIASTRELLE** with a roller, at a consumption of approximately 0.130 kg/m<sup>2</sup>.
2. Apply one coat of **PAVIWATER**, diluted 10% with water, with a product consumption of approximately 0.130 kg/m<sup>2</sup>.
3. Apply a second coat of **PAVIWATER**, diluted 10% with water, with a product consumption of approximately 0.130 kg/m<sup>2</sup>.

**PAVIWATER** can be mixed with granular aggregates to achieve a non-slip surface.

The resulting coating thickness is approximately 0.15 mm.

### Used products

#### **PAVIWATER® A+B**

Colored water emulsion epoxy formulation (a+b)

#### **FONDO PER PIASTRELLE A+B**

---

The above information corresponds to our best scientific and practical knowledge and does not imply any guarantees and/or liability for Sivit, as the conditions of use are beyond our control. The purchaser is responsible for verifying the suitability of the products for the specific case.

VER07 • Technical sheet • 01/12/2025

---

#### **Sivit S.r.l.**

Via Centallo 57, 10156, Torino, Italia | P.I. - C.F. 01012820013 | C.C.I.A.A. N. 478878 | Reg. Soc. Tribunale Torino N. 305/74

Sistema di gestione conforme alle ISO 9001:2015 – ISO 14001:2015 – ISO 45001:2018

**commerciale@sivit.it | sivit srl@pec.it | +39 011 273 00 33 | www.sivit.it**